


## DATA SHEET MINERAL FIBRE




### Sinfonia C

Order code	Edge	Size	Each/carton
116791	SBK	1187 x 396 x 15mm	10
121589	SBK	1337 x 446.5 x 15mm	10

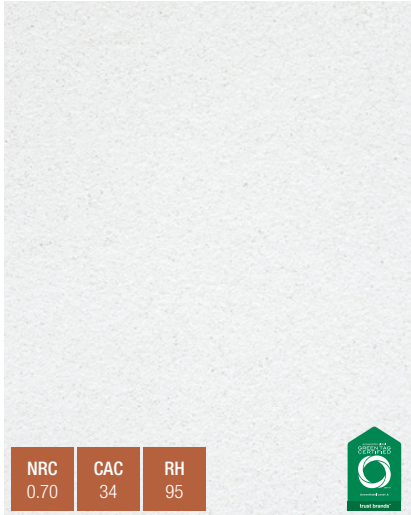

KERFED, BEVELLED AND  
CUT BACK (SBK)

#### Sound Absorption Value

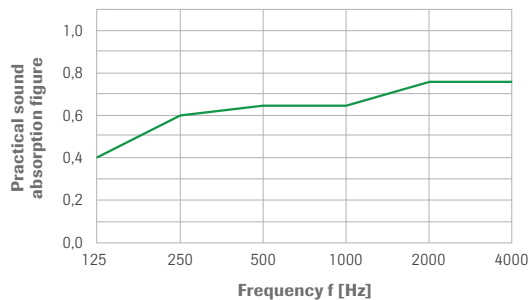

Freq. [HZ]	Suspension depth E200 $\alpha_p$
125	0.40
250	0.60
500	0.65
1000	0.65
2000	0.75
4000	0.75
NRC	0.70
$\alpha_w$	0.70
SRA	0.70

<b>Weight</b>	Approx 5.6kg/m <sup>2</sup>
<b>Fire Resistance</b>	Achieves Group 1 Fire Rating in accordance with AS5637.1:2015
<b>Light Reflection</b>	Approx 87 (ISO 7724-2, ISO 7724-3)
<b>Cleanroom Class</b>	Up to ISO 5 (ISO 14644-1:1999)
<b>Recycled Content</b>	This tile is 100% recyclable and is manufactured with up to 32% recycled content
<b>Green Certification</b>	Level A Ecospecifier Global Greentag Certification
<b>Warranty</b>	Up to 30 Years when used in conjunction with Rondo Duo Exposed Steel Grid. Please see our warranty for full details

**Care and Maintenance** OWA Mineral Fibre Acoustic Tiles are manufactured using the wet-felt process according to DIN18177 which means that by design, less dirt is trapped in the ceiling panel. However, if cleaning is required tiles can be vacuumed or wiped with a damp cloth soaked in clean water