


DATA SHEET MINERAL FIBRE




NRC 0.70	CAC 41	RH 95
--------------------	------------------	-----------------

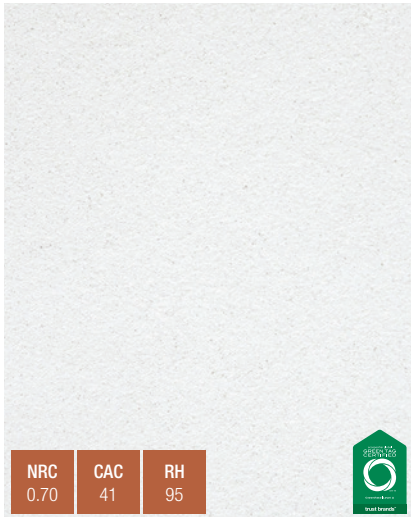


Sinfonia Privacy

Order code	Edge	Size	Each/carton
164980	SQ	1200 x 600 x 20mm	8
450429	SQ	600 x 600 x 20mm	8

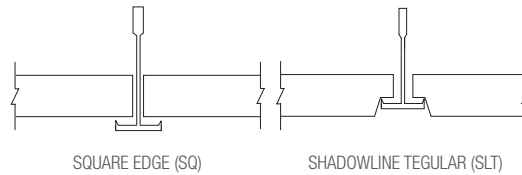

Sound Absorption Value

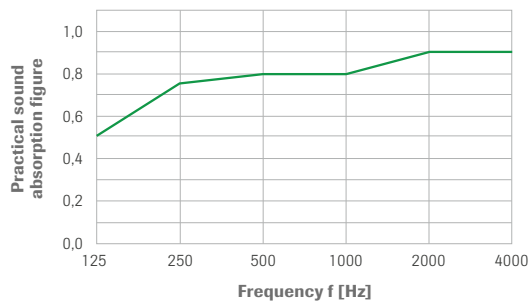

Freq. [HZ]	Suspension depth E200 α_p
125	0.50
250	0.75
500	0.80
1000	0.80
2000	0.90
4000	0.90
NRC	0.85
α_w	0.85
SRA	0.85

Weight	Approx 6.4kg/m ²
Fire Resistance	Achieves Group 1 Fire Rating in accordance with AS5637.1:2015
Light Reflection	Approx 87 (ISO 7724-2, ISO 7724-3)
Cleanroom Class	Up to ISO 5 (ISO 14644-1:1999)
Recycled Content	This tile is 100% recyclable and is manufactured with up to 32% recycled content
Green Certification	Level A Ecospecifier Global Greentag Certification
Warranty	Up to 30 Years when used in conjunction with Rondo Duo Exposed Steel Grid. Please see our warranty for full details

Care and Maintenance OWA Mineral Fibre Acoustic Tiles are manufactured using the wet-felt process according to DIN18177 which means that by design, less dirt is trapped in the ceiling panel. However, if cleaning is required tiles can be vacuumed or wiped with a damp cloth soaked in clean water